


WINDOM PORTABLE SPA

STAINLESS STEEL ABOVE GROUND SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING & ESTIMATING ONLY

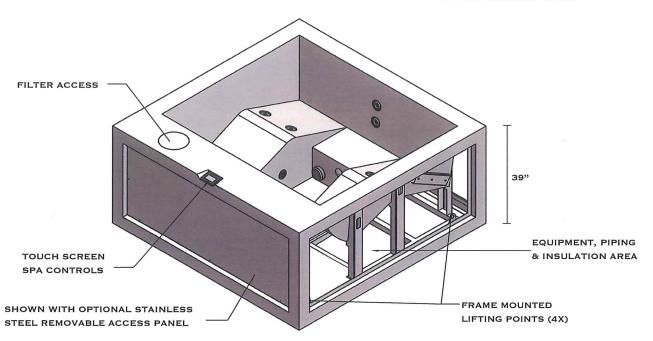

FEATURES:

- + 316L STAINLESS STEEL SPA SHELL WITH 304L STAINLESS STEEL FRAME
- + REMOVABLE ACCESS PANELS ARE AVAILABLE IN STAINLESS STEEL OR COPPER
- + 4 BATHER CAPACITY DUAL LOUNGER LAYOUT
- + LED LIGHTING
- + 14 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 86" X 86" X 39"
- + WATER CAPACITY: 312 GALLONS
- + EMPTY WEIGHT: 1,562 LBS
- + FULL WEIGHT: 4,168 LBS


CERTIFICATIONS:

STAINLESS STEEL & COPPER SHELLS:

+ IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- (1X) 230V 50A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL AND 5.5KW ELECTRIC HEATER
- + SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR






WINDOM PORTABLE SPA

COPPER ABOVE GROUND SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING & ESTIMATING ONLY

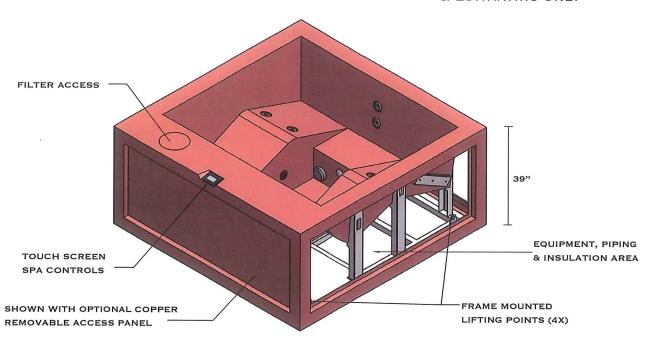

FEATURES:

- + COPPER SPA SHELL WITH 304L STAINLESS STEEL SUPPORT FRAME
- REMOVABLE ACCESS PANELS ARE AVAILABLE IN STAINLESS STEEL OR
 COPPER
- + 4 BATHER CAPACITY DUAL LOUNGER LAYOUT
- + LED LIGHTING
- + 14 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 86" x 86" x 39"
- + WATER CAPACITY: 312 GALLONS
- * EMPTY WEIGHT: 1,660 LBS
- + FULL WEIGHT: 4,266 LBS

CERTIFICATIONS:

STAINLESS STEEL & COPPER SHELLS:

+ IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- (1X) 230V 50A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL AND 5.5KW ELECTRIC HEATER
- SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR

