




WINDOM PORTABLE SPA

STAINLESS STEEL INGROUND WITH AUTOCOVER

SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING
& ESTIMATING ONLY

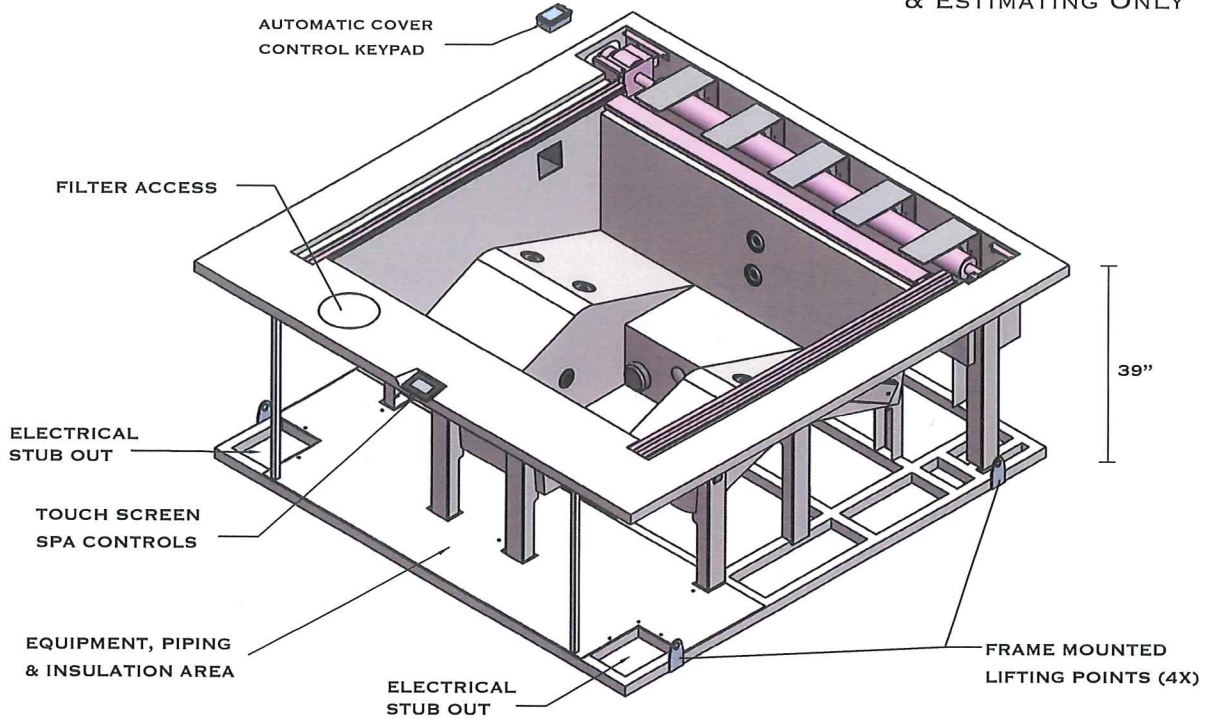

FEATURES:


- + 316L STAINLESS STEEL SPA SHELL WITH 304L STAINLESS STEEL FRAME
- + 4 BATHER CAPACITY DUAL LOUNGER LAYOUT
- + LED LIGHTING
- + 14 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 101" X 101" X 39"
- + WATER CAPACITY: 312 GALLONS
- + EMPTY WEIGHT: 1,873 LBS
- + FULL WEIGHT: 4,479 LBS

CERTIFICATIONS:

- STAINLESS STEEL & COPPER SHELLS:
- + IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- + (1X) 230V 50A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL AND 5.5KW ELECTRIC HEATER
- + (1X) 120V 15A GFCI SERVICE AT AUTOCOVER KEYPAD
- + SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR

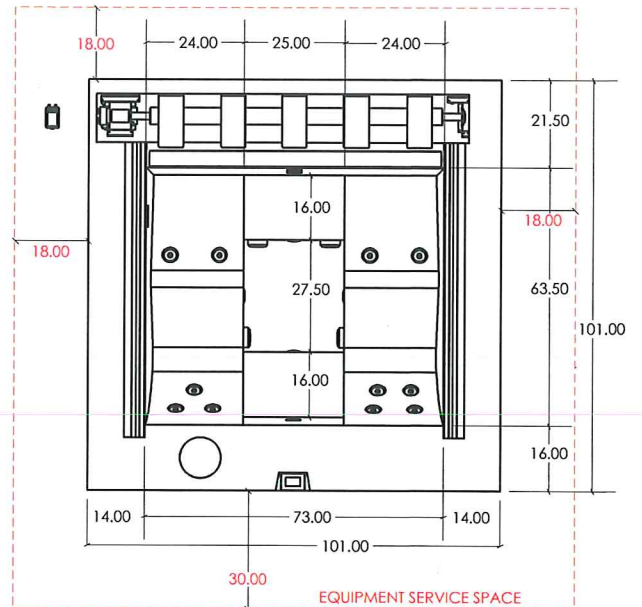

1.800.951.SPAS (7727) 720.864.9115 FAX 866.605.2358

DIAMONDSPAS.COM INFO@DIAMONDSPAS.COM




WINDOM PORTABLE SPA

COPPER INGROUND WITH AUTOCOVER

SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING
& ESTIMATING ONLY

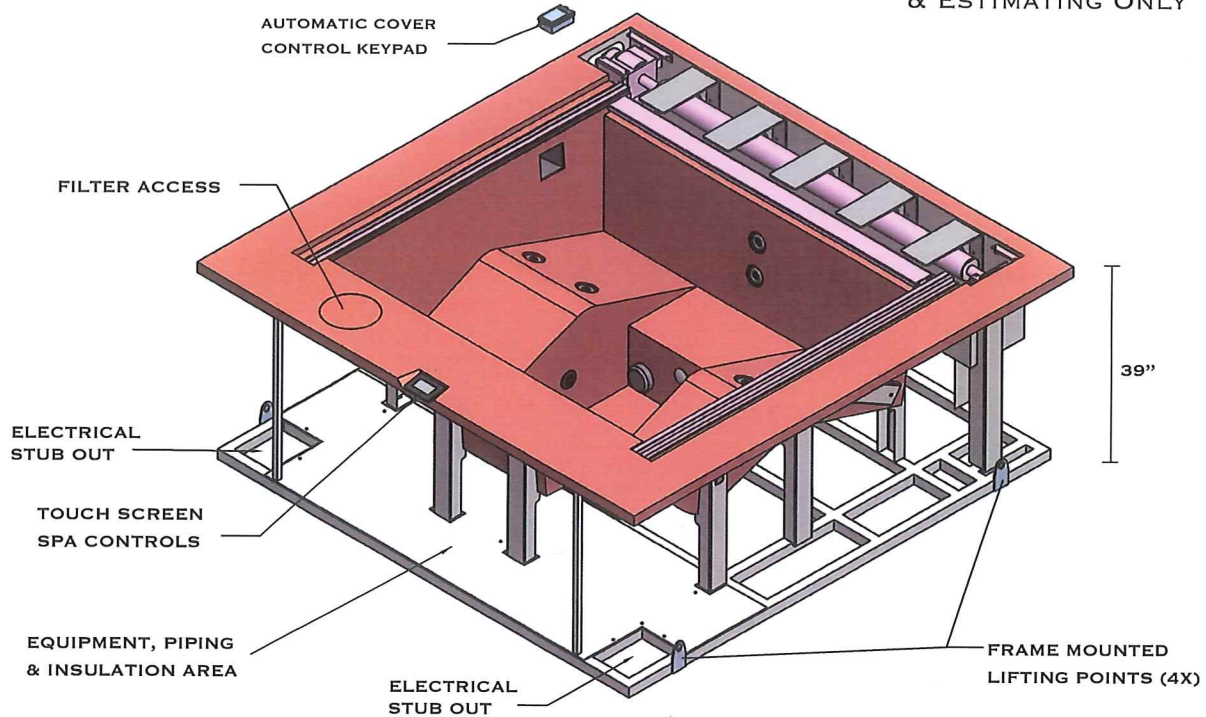

FEATURES:

- + COPPER SPA SHELL WITH 304L STAINLESS STEEL SUPPORT FRAME
- + 4 BATHER CAPACITY DUAL LOUNGER LAYOUT
- + LED LIGHTING
- + 14 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 101" X 101" X 39"
- + WATER CAPACITY: 312 GALLONS
- + EMPTY WEIGHT: 1,966 LBS
- + FULL WEIGHT: 4,572 LBS

CERTIFICATIONS:

- STAINLESS STEEL & COPPER SHELLS:
- + IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- + (1X) 230V 50A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL AND 5.5KW ELECTRIC HEATER
- + (1X) 120V 15A GFCI SERVICE AT AUTOCOVER KEYPAD
- + SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR

